

CQ-1-2 CQ-1A Super Safety Suitcase

Operation manual

1.Main function and application scope:

CQ-1 super safety suitcase is a super safety product that can ensure the valuables and confidential documents in the suitcase not easy to lose. At any time it can warn to the owner any conditions to caution him to raise vigilance. At emergency the owner can remote the suitcase to electrically shock the gangsters and thieves to make them dare not to take reckless actions. This product has particular “anti-losing, anti-stealing, anti-robbing, electric shock”, 3-anti self-defense functions, thereby it can be widely used for carrying and keeping cash, confidential documents and various valuables. It is the good friend and reliable guard for numerous persons to execute official and business affairs as well as the true bodyguard of individual properties.

2.Main technical specifications:

- 2.1 3-anti self-defense functions such as anti-losing, anti-stealing, anti-robbing
- 2.2 Anti-losing effect distance 3 15M
- 2.3 Anti-robbing effect distance >50m
- 2.4 Electric shock high voltage pulse power supply>30KV
- 2.5 Alarm sound level>85dB
- 2.6 Power supply:
 - Transmitting remote box: one type 23A battery with 12V voltage
 - Alarm electric shock device: six 2# batteries with 9V voltage
- 2.7 Specification: 18 inches
- 2.8 Dimensions: 18*3.6*13.6(length*height*width)
- 2.9 Material: high-grade genuine leather (CQ-1A)
high-grade leatheroid (CQ-1-2)

3.Facility combination:

- 3.1 Suitcase 1pc
- 3.2 Alarm electric shock box 1pc (in suitcase)
- 3.3 Remote 1pc
- 3.4 Charger 1pc (CQ-1-2 and CQ-1A only)
- 3.5 Operation manual 1set

4.Operation instruction

In application, first install the batteries accurately then check the safe apparatus is

normal and battery voltage enough. If insufficient voltage, then replace the batteries, use the remote simply check all functional status, and it is only applicable after normal operation

A. Battery Installation & Check battery voltage

Alarm electric shock device Battery Installation

Demount the bolts which attach the cover to the battery box with a screwdriver, take away the cover, and put six 1.2V 2# (type C) chargeable batteries or 1.5V 2# (type C) alkali batteries into the battery box. And then amount the cover and tighten the screws. If your operation is successful, when you push down the power-on button, you will see the index light is lightened.

remote battery installation:

Open the cover of the remote controller, put a type of 23A battery into the controller box, and then mount the cover.

Attention: Keep from the button not being lock when mounting the cover!

Check battery voltage (see Fig.1)

- (1) Turn on power 1(power on)
- (2) Power indicator 2 on
- (3) Push battery check button 3
- (4) If battery voltage indicator 5,6 on at the same time, then the battery voltage enough, if one not on or both not on, then the battery voltage is insufficient, and replace the batteries.

Battery charging

In Alarm electric shock box can use rechargeable batteries, and can use the charger and the Recharge jack (8 of Fig.1) to recharge batteries directly, when recharging the Recharge indicator (7 of Fig.1) will on.

Note: Battery voltage must ensure the operation voltage, otherwise it will alarm, with abnormal electric shock.

B. Anti-losing mode(see Fig.1 and 2)

Take out remote from the suitcase, place a type of 23A battery.

- (1) Turn on Power switch 1(power on)
- (2) Power indicator 2 shine
- (3) Operation selection switch push on “Anti-losing” mode “GUARD”
- (4) Remote indicator LED2 flash

At this time remote alarm device is on guarding mode, when the master leave the suitcase or the suitcase is taken away by other people, it will automatically alarm to remind the master.

- (5) Operation selection switch is pushed to the “ON” position, and press “STOP” i.e., “Anti-losing” mode removed.

Notice: Anti-losing mode only be used solely.

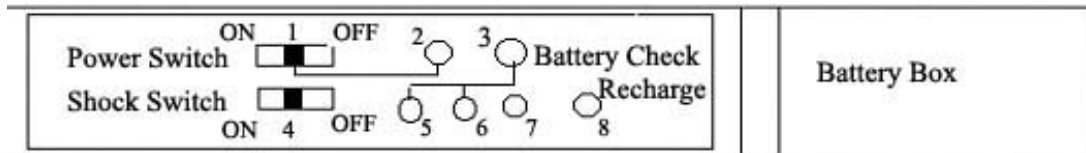


Fig.1 Alarm electric shock box

- 1.Power switch
- 2.Power indicator
- 3.Battery voltage check button
- 4.Electric shock switch
- 5,6.Battery voltage indicator
- 7.Recharge indicator
- 8.Recharge jack

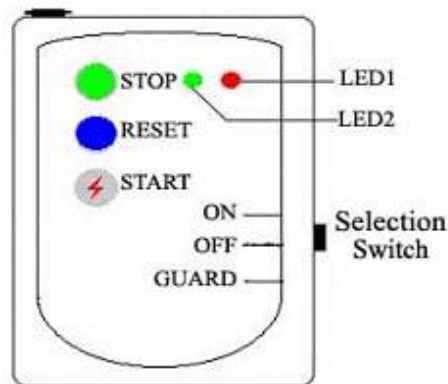


Fig 2. Remote

C. Anti-stealing mode (see Fig.1 and 2)

- (1) Turn on Power switch 1 (power on)
- (2) Power indicator 2 shine
- (3) Turn on Shock switch 4
- (5) Push Operation selection switch of remote to the “ON” position
- (6) Press PRESER button i.e., anti-stealing button (PRESER ON)
- (7) Remote indictor LED1 shine once, and alarm device “tooting”

The alarm device warns, the alarm shock is on guard, and when thief touches the suitcase, it will warn in time and in the shock mode. After the thief is shocked he or she will dare not touch the suitcase to ensure it will not be stolen. (Each time it will last several seconds)

- (8) Press “STOP” button, the alarm device “tooting” i.e., “Anti-stealing” mode removed

D. Anti-robbing mode (see Fig.1 and 2)

- (1) Turn on power switch 1 and Shock switch 4
- (2) Push Operation selection button of remote to the “ON” position

(3) When the robber knows there are cash or valuables and prepared to rob, the master can fight. If the suitcase is robbed by the thief at emergency the master can at proper time and distance operate the remote and press “START” button, at this time the alarm warns and generate shock, and the robber then will be shocked and the master could take back the suitcase.

(4) Press “STOP” button to stop warning and shock.

5. Cautions

5.1 If you do not use the suitcase for a long term, please take off the batteries to avoid the leakage and corrosion of parts.

5.2 If the suitcase is not in use, please place it in cool and dry place and not in the wet place or under sunshine to avoid damaging of suitcase.

5.3 Often coat shining oil or leather oil to keep the gloss of suitcase.

5.4 It is not allowed to put inflammables, explosive and corrosive articles.

5.5 You must use super alkali or chargeable batteries.

6. Application examples

A. Application of 3-anti self-defense functions when touring or out side on business

(1) “Anti-losing” function

In touring to prevent suitcase with valuables from missing or being taken by anyone, you may set the suitcase to “Anti-losing” mode, taking remote with you all the time. Once you leave your suitcase a certain distance (3-15m), it will automatically send alarm signal to remind the master of not forgetting to take the important articles, if you find your suitcase is take away by the thief immediately use “Anti-robbing” function to force the thief to throw away your suitcase.

(2) “Anti-stealing” function

When the master needs to leave his suitcase to do other business (registration, shopping or out, etc.), use the “Anti-stealing” function, press Anti-stealing button and after hearing “tooting”, take the remote with you and then do your own business. Once gangsters and thieves touch your suitcase at any part, it will immediately alarm and shock. Even though the master is leaving, gangsters and thieves have to keep away.

(3) “Anti-robbing” function

When you are out and meeting threatening of robbers, give up the suitcase temporarily for your safe purpose. When the robbers keep way from you and will not threaten you, you may use “Anti-robbing” function, and quickly take out your remote and press “Anti-robbing” button, the suitcase will immediately generate alarm and high voltage shock to force the robbers give up suitcase and run away. In this case “Anti-robbing” function will protect you under terrible robbing and ensure you and your valuables safe.

B. Application of household “Anti-stealing” function

Possibly residential houses may be visited by gangsters and thieves, even though the

master takes many measures, it is still unavoidable. Using 3-anti self-defense to keep valuables may be a wise selection and when the master is out he or she only needs to set it in “Anti-stealing” mode to ensure safety. Once the thief is invading, when he or she is touching any part of the suitcase, the alarm and shock will immediately be effective and they will run away.

C. Application of once “Anti-stealing” function

It is a troublesome for the leaders to keep the confidential files, contracts and information, if you use “Anti-stealing” function, the leaders will not worry about them.

D. Application of financial department 3-anti self-defense function

(1) “Anti-stealing” function

Accountant in charge considers a lot for the prevention of anti-stealing, they put monitors, safe and so on, but not ideal and often they have their safe lost. It is serious once it happens, but if you add “Anti-stealing” function, thieves and gangsters could not reach it, therefore it is completely safe.

(2) “Anti-robbing” function

In the case of preparing salaries or large volume capitals, many enterprises send guards to accompany the treasurers for taking out the cash. If you use “Anti-robbing” function accountants will be easy and convenient to withdraw the cash. When robbed, you should quickly take out the remote then press “anti-robbing” button, the suitcase immediately generates alarm and shock to strike down the gangsters and resize the suitcase.

Under any circumstances, properly using 3-anti self-defense functions will protect your property, and our products will be your loyal guard.